

TRIAC(Through Hole / Non-isolated)

TMG25CQ60L

(T_j=150°C)


SanRex Triac TMG25CQ60L is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- I_{T(RMS)}=25A
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

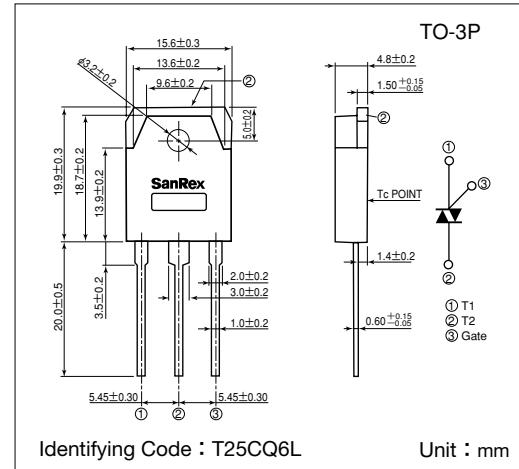

■ Maximum Ratings

(T_j=25°C unless otherwise specified)

Symbol	Item	Reference	Ratings		Unit
V _{DRM}	Repetitive Peak Off-State Voltage		600		V
I _{T(RMS)}	R.M.S. On-State Current	T _c =114°C	25		A
I _{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	225/250		A
I _t	I _t (for fusing)		260		A ² S
P _{GM}	Peak Gate Power Dissipation		5		W
P _{G(AV)}	Average Gate Power Dissipation		0.5		W
I _{GM}	Peak Gate Current		2		A
V _{GM}	Peak Gate Voltage		10		V
T _j	Operating Junction Temperature		−40~+150		°C
T _{stg}	Storage Temperature		−40~+150		°C
	Mass		5.1		g

■ Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit
			Min.	Typ.	Max.	
I _{DRM}	Repetitive Peak Off-State Current	V _D =V _{DRM} , Single phase, half wave, T _j =150°C			5	mA
V _{TM}	Peak On-State Voltage	I _T =35A, Inst. measurement			1.4	V
I _{GT1} 1	Gate Trigger Current	V _D =6V, R _L =10Ω			30	mA
I _{GT1} 2					30	
I _{GT3} 3					—	
I _{GT3} 4					30	
V _{GT1} 1	Gate Trigger Voltage	V _D =6V, R _L =10Ω			1.5	V
V _{GT1} 2					1.5	
V _{GT3} 3					—	
V _{GT3} 4					1.5	
V _{GD}	Non-Trigger Gate Voltage	T _j =150°C, V _D =1/2V _{DRM}	0.1			V
[dv/dt] _C	Critical Rate of Rise of Off-State Voltage at Commutation	T _j =150°C, [di/dt] _C =−12.5A/ms, V _D =2/3V _{DRM}	5			V/μs
I _H	Holding Current			35		mA
R _{th}	Thermal Resistance	Junction to case			1.2	°C/W

Trigger mode of the triac

