

# TRIAC(Through Hole / Isolated)

# TMG25C60F


**SanRex** Triac TMG25C60F is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

## Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

## Features

- $I_T(RMS)=25A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

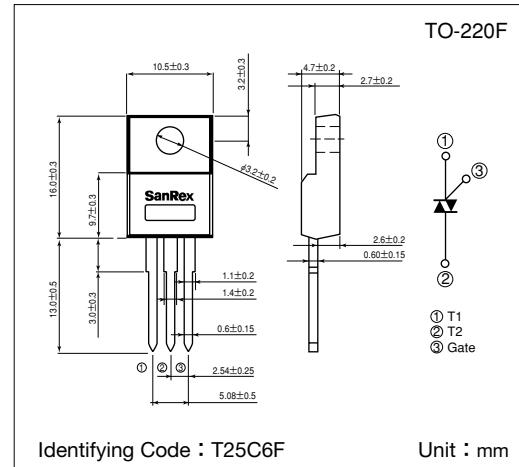

## ■ Maximum Ratings


( $T_j=25^\circ\text{C}$  unless otherwise specified)









Symbol	Item	Reference	Ratings		Unit
$V_{DRM}$	Repetitive Peak Off-State Voltage		600		V
$I_{T(RMS)}$	R.M.S. On-State Current	$T_c=68^\circ\text{C}$	25		A
$I_{TSM}$	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	225/250		A
$I^2t$	$I^2t$ (for fusing)		260		$\text{A}^2\text{s}$
$P_{GM}$	Peak Gate Power Dissipation		5		W
$P_{G(AV)}$	Average Gate Power Dissipation		0.5		W
$I_{GM}$	Peak Gate Current		2		A
$V_{GM}$	Peak Gate Voltage		10		V
$V_{ISO}$	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	1500		V
$T_j$	Operating Junction Temperature		-40~+125		$^\circ\text{C}$
$T_{stg}$	Storage Temperature		-40~+150		$^\circ\text{C}$
	Mass		2.2		g

## ■ Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit
			Min.	Typ.	Max.	
$I_{DRM}$	Repetitive Peak Off-State Current	$V_D=V_{DRM}$ , Single phase, half wave, $T_j=125^\circ\text{C}$			5	mA
$V_{TM}$	Peak On-State Voltage	$I_T=35\text{A}$ , Inst. measurement			1.4	V
$I_{GT1}^+$ 1	Gate Trigger Current	$V_D=6\text{V}$ , $R_L=10\Omega$			30	mA
$I_{GT1}^-$ 2					30	
$I_{GT3}^+$ 3					—	
$I_{GT3}^-$ 4					30	
$V_{GT1}^+$ 1	Gate Trigger Voltage				1.5	V
$V_{GT1}^-$ 2					1.5	
$V_{GT3}^+$ 3					—	
$V_{GT3}^-$ 4					1.5	
$V_{GD}$	Non-Trigger Gate Voltage	$T_j=125^\circ\text{C}$ , $V_D=\frac{1}{2}V_{DRM}$	0.2			V
$(dv/dt)_c$	Critical Rate of Rise of Off-State Voltage at Commutation	$T_j=125^\circ\text{C}$ , $(di/dt)_c=-12.5\text{A/ms}$ , $V_D=\frac{2}{3}V_{DRM}$	10			$\text{V}/\mu\text{s}$
$I_H$	Holding Current			35		mA
$R_{th}$	Thermal Resistance	Junction to case			1.9	$^\circ\text{C}/\text{W}$

Trigger mode of the triac

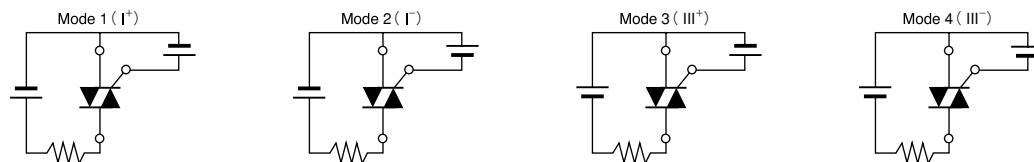

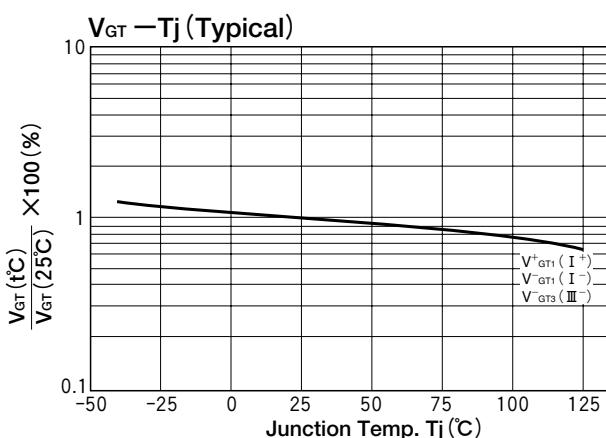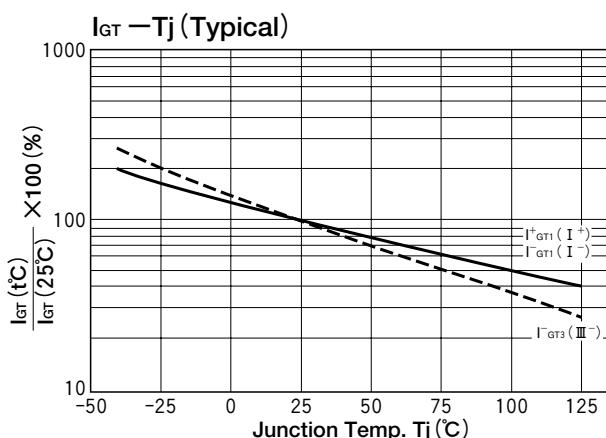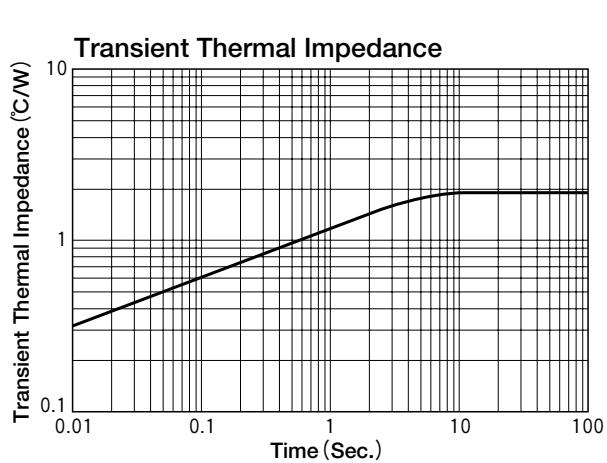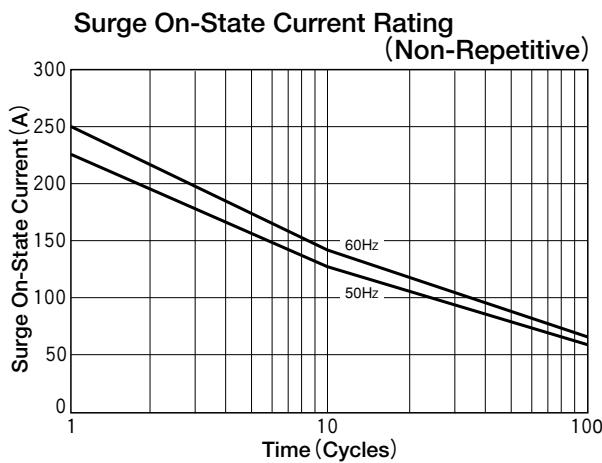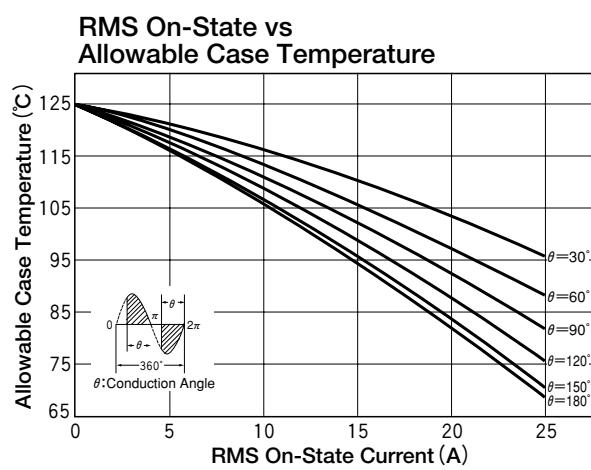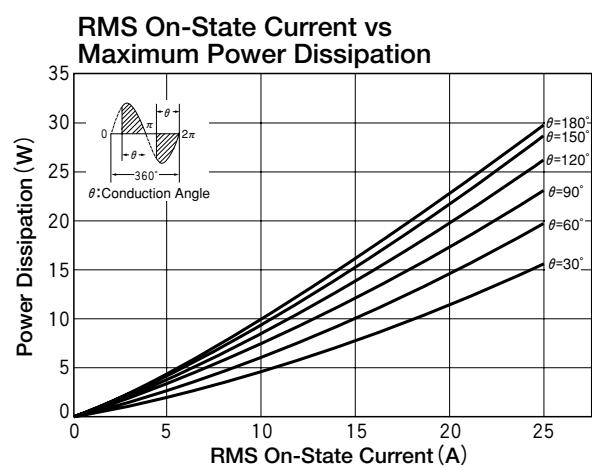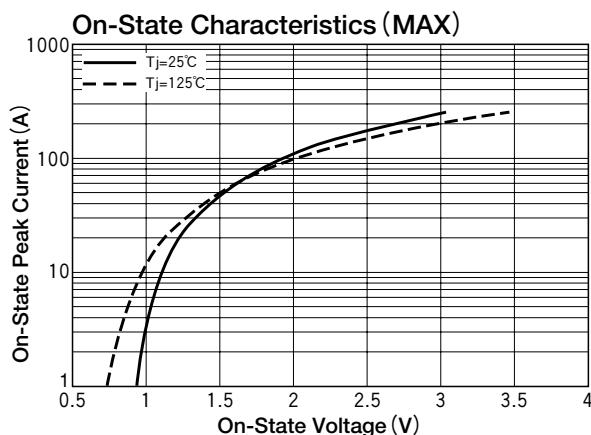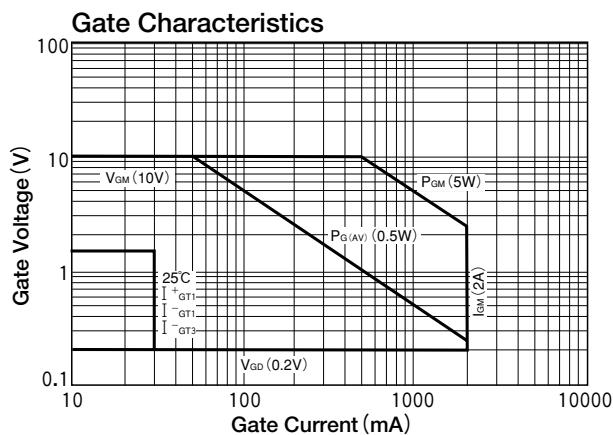

# TRIAC(Through Hole / Isolated)

# TMG25C80F


**SanRex** Triac TMG25C80F is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

### Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

### Features

- $I_{T(RMS)}=25A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

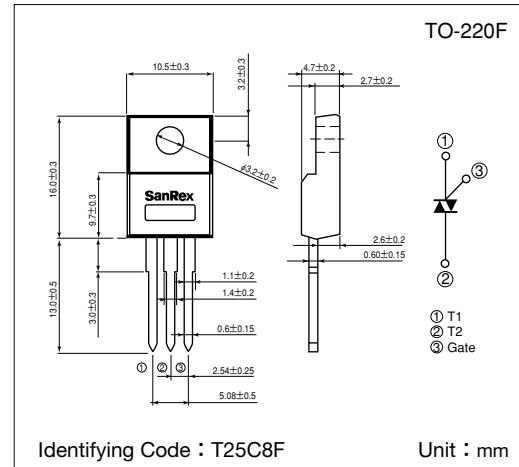

### ■ Maximum Ratings

( $T_j=25^\circ\text{C}$  unless otherwise specified)

Symbol	Item	Reference	Ratings		Unit
$V_{DRM}$	Repetitive Peak Off-State Voltage		800		V
$I_{T(RMS)}$	R.M.S. On-State Current	$T_c=68^\circ\text{C}$	25		A
$I_{TSM}$	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	225/250		A
$I^2t$	$I^2t$ (for fusing)		260		$\text{A}^2\text{s}$
$P_{GM}$	Peak Gate Power Dissipation		5		W
$P_{G(AV)}$	Average Gate Power Dissipation		0.5		W
$I_{GM}$	Peak Gate Current		2		A
$V_{GM}$	Peak Gate Voltage		10		V
$V_{ISO}$	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	1500		V
$T_j$	Operating Junction Temperature		-40~+125		$^\circ\text{C}$
$T_{stg}$	Storage Temperature		-40~+150		$^\circ\text{C}$
	Mass		2.2		g

### ■ Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit
			Min.	Typ.	Max.	
$I_{DRM}$	Repetitive Peak Off-State Current	$V_D=V_{DRM}$ , Single phase, half wave, $T_j=125^\circ\text{C}$			5	mA
$V_{TM}$	Peak On-State Voltage	$I_T=35\text{A}$ , Inst. measurement			1.4	V
$I_{GT1}^+$ 1	Gate Trigger Current	$V_D=6\text{V}$ , $R_L=10\Omega$			30	mA
$I_{GT1}^-$ 2					30	
$I_{GT3}^+$ 3					—	
$I_{GT3}^-$ 4					30	
$V_{GT1}^+$ 1	Gate Trigger Voltage				1.5	V
$V_{GT1}^-$ 2					1.5	
$V_{GT3}^+$ 3					—	
$V_{GT3}^-$ 4					1.5	
$V_{GD}$	Non-Trigger Gate Voltage	$T_j=125^\circ\text{C}$ , $V_D=\frac{1}{2}V_{DRM}$	0.2			V
$(dv/dt)_c$	Critical Rate of Rise of Off-State Voltage at Commutation	$T_j=125^\circ\text{C}$ , $(dv/dt)_c=-12.5\text{A/ms}$ , $V_D=400\text{V}$	10			$\text{V}/\mu\text{s}$
$I_H$	Holding Current			35		mA
$R_{th}$	Thermal Resistance	Junction to case			1.9	$^\circ\text{C}/\text{W}$

Trigger mode of the triac

