

TRIAC(Through Hole / Non-isolated)

TMG5C60


SanRex Triac TMG5C60 is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_T(RMS)=5A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

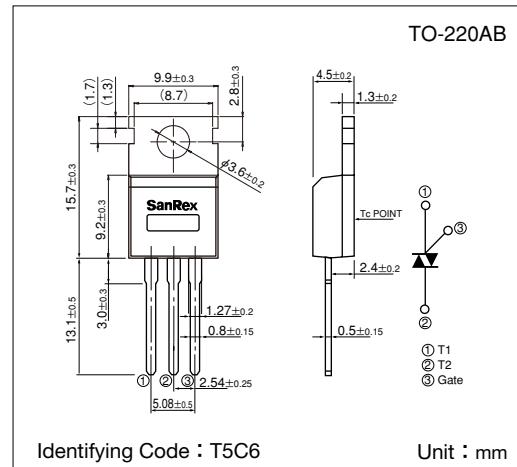

■ Maximum Ratings

($T_j=25^\circ C$ unless otherwise specified)

Symbol	Item	Reference	Ratings		Unit
V_{DRM}	Repetitive Peak Off-State Voltage		600		V
$I_T(RMS)$	R.M.S. On-State Current	$T_c=107^\circ C$	5		A
I_{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	50/55		A
I_{t^*}	I_{t^*} (for fusing)		12.6		A ² S
P_{GM}	Peak Gate Power Dissipation		3		W
$P_{G(AV)}$	Average Gate Power Dissipation		0.3		W
I_{GM}	Peak Gate Current		2		A
V_{GM}	Peak Gate Voltage		10		V
T_j	Operating Junction Temperature		-40~+125		°C
T_{stg}	Storage Temperature		-40~+150		°C
	Mass		2		g

■ Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-State Current	$V_D=V_{DRM}$, Single phase, half wave, $T_j=125^\circ C$			1	mA
V_{TM}	Peak On-State Voltage	$I_T=7A$, Inst. measurement			1.4	V
I_{GT1}^+ 1	Gate Trigger Current	$V_D=6V$, $R_L=10\Omega$			20	mA
I_{GT1}^- 2					20	
I_{GT3}^+ 3					—	
I_{GT3}^- 4					20	
V_{GT1}^+ 1	Gate Trigger Voltage				1.5	V
V_{GT1}^- 2					1.5	
V_{GT3}^+ 3					—	
V_{GT3}^- 4					1.5	
V_{GD}	Non-Trigger Gate Voltage	$T_j=125^\circ C$, $V_D=\frac{1}{2}V_{DRM}$	0.2			V
$(dv/dt)_c$	Critical Rate of Rise of Off-State Voltage at Commutation	$T_j=125^\circ C$, $(di/dt)_c=-2.5A/ms$, $V_D=\frac{2}{3}V_{DRM}$	5			V/ μ s
I_H	Holding Current			10		mA
R_{th}	Thermal Resistance	Junction to case			3.0	°C/W

Trigger mode of the triac

